



MCK
900
DESIGN



SERVİS ASANSÖRLERİ


SERVICE ELEVATORS

TECHNOLOGY
TECHNOLOGY
AND
DESIGN
DESIGN


MK15.000.00 / 01.2011




MODELS

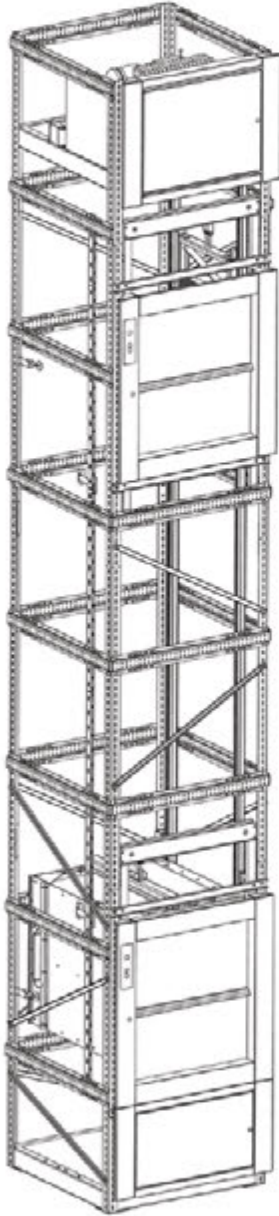

SINGLE ENTRANCE

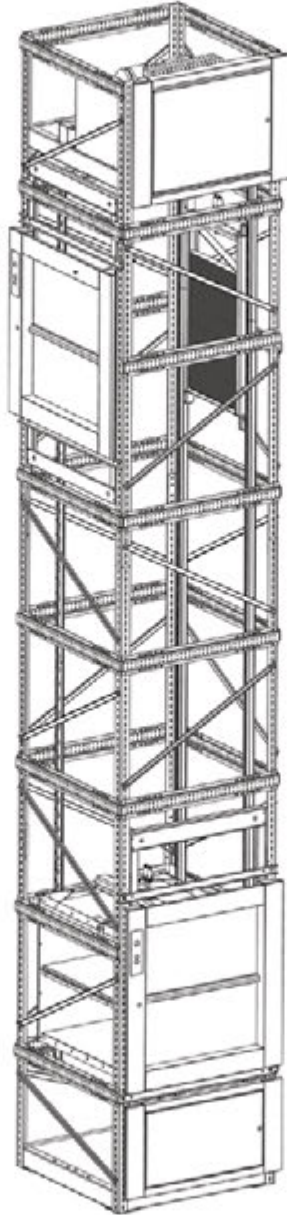


DIAGONAL ENTRANCE

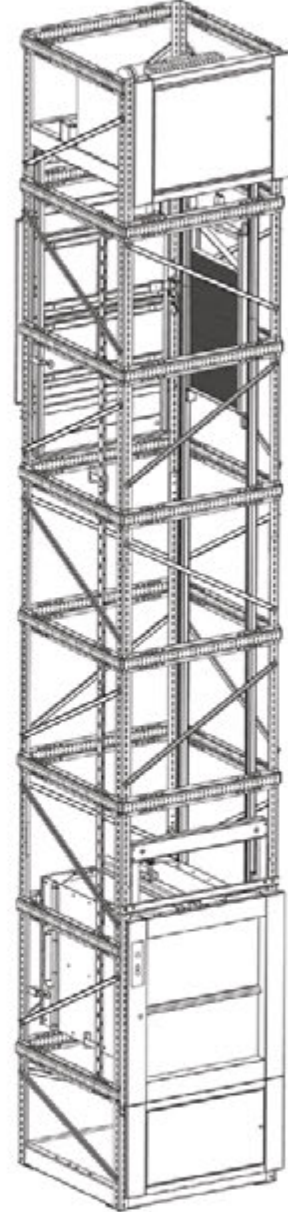

PARALLEL ENTRANCE

► GUILLOTINE DOOR SINGLE ENTRANCE MCK 911


► 50 KG - 100 KG - 150 KG

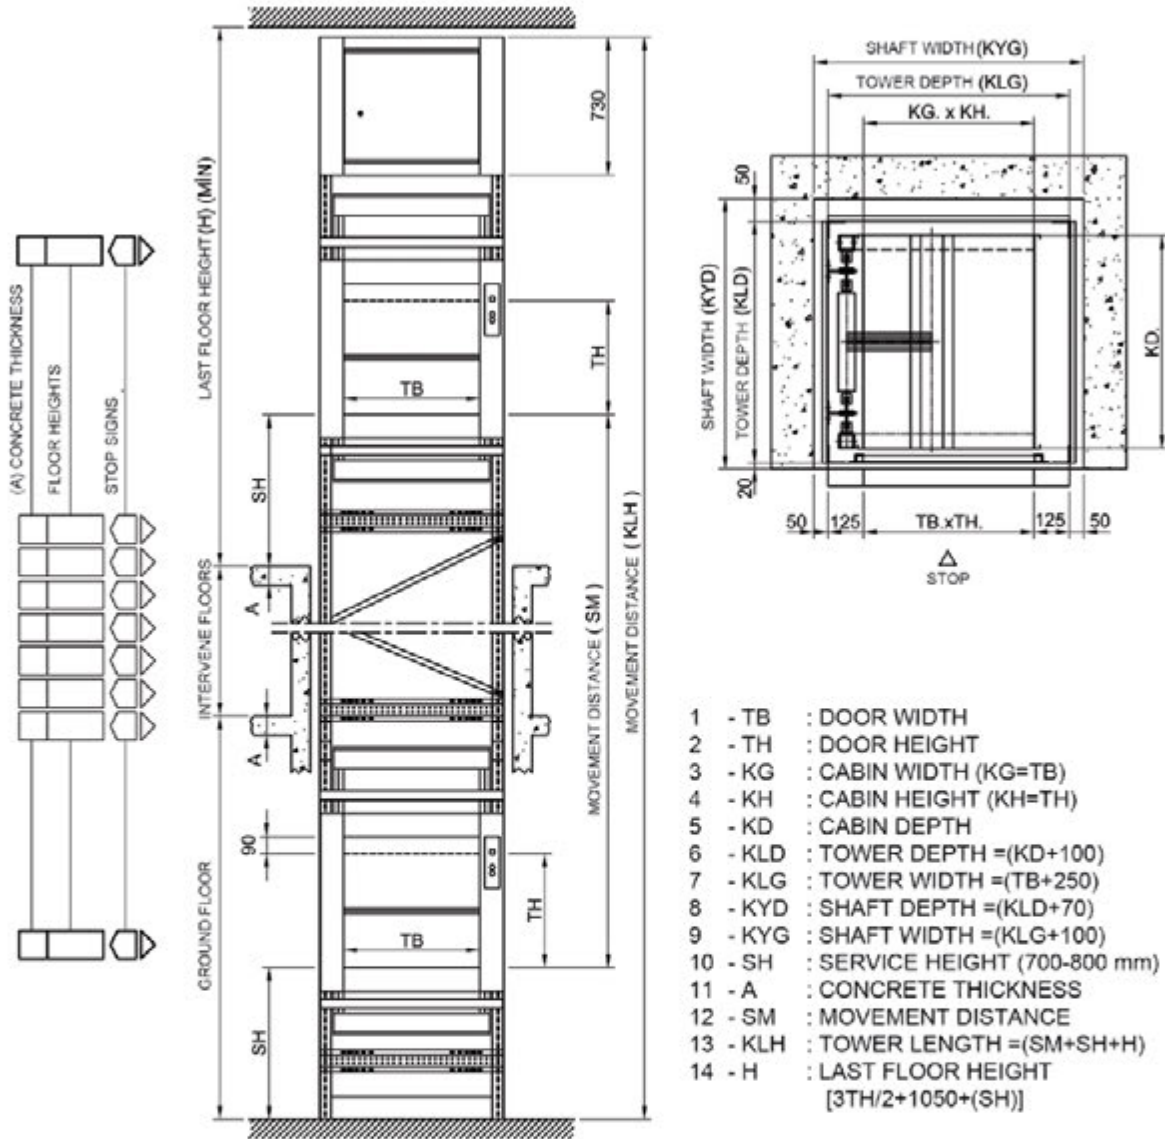

CAPACITY (Kg)	CABIN AREA (m²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
50 kg	0.20 m² - 0.36 m²	0.4	400 600	500 600	500 600	AG . 25.24	1 / 1
100 kg	0.37 m² - 0.50 m²	0.4	610 700	610 700	600 800		1 / 1
150 kg	0.5 m² - 0.64 m²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m² - 1 m²	0.4	810 1000	810 1000	1000 1200		1 / 2

➤ GUILLOTINE DOOR PARALLEL ENTRANCE MCK 912


➤ 50 KG - 100 KG - 150 KG

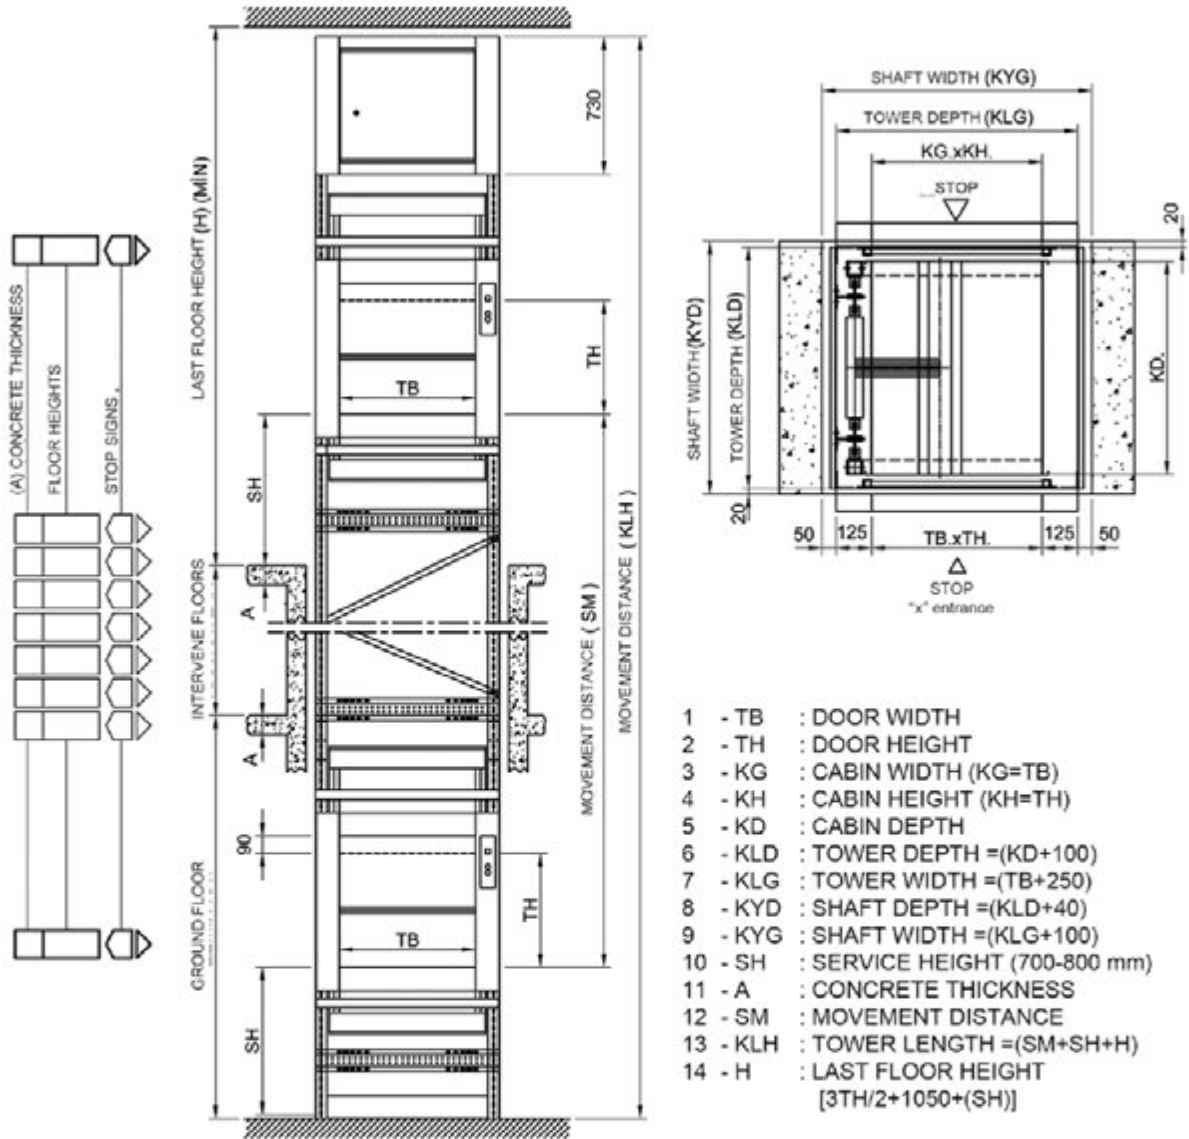

CAPACITY (Kg)	CABIN AREA (m ²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
50 kg	0.20 m ² - 0.36 m ²	0.4	400 600	500 600	500 600	AG . 25.24	1 / 1
100 kg	0.37 m ² - 0.50 m ²	0.4	610 700	610 700	600 800		1 / 1
150 kg	0.5 m ² - 0.64 m ²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m ² - 1 m ²	0.4	810 1000	810 1000	1000 1200		1 / 2

➤ GUILLOTINE DOOR DIAGONAL ENTRANCE MCK 913


➤ 50 KG - 100 KG - 150 KG

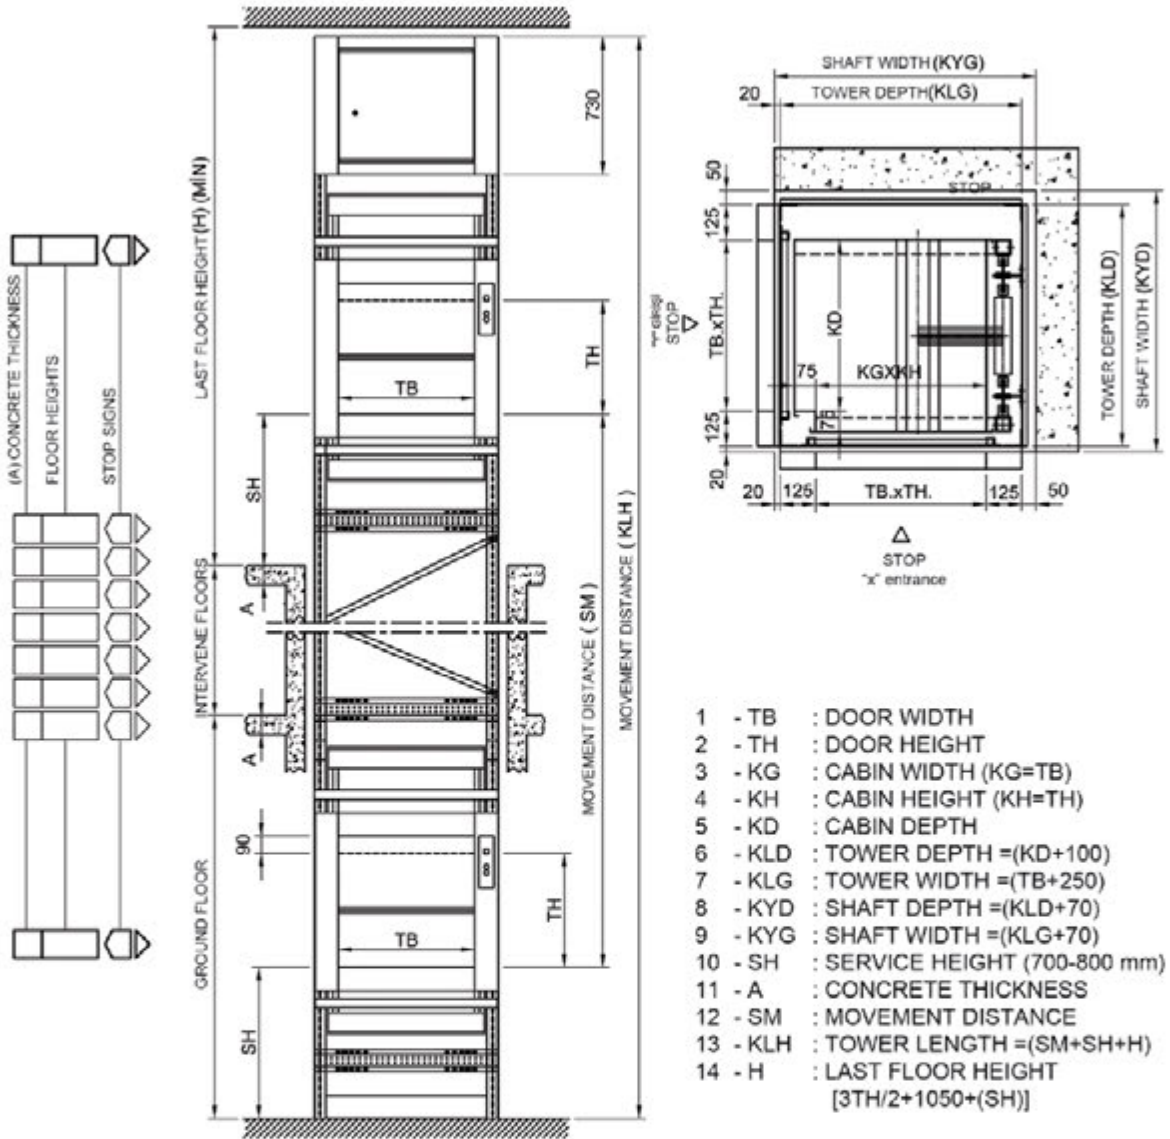

CAPACITY (Kg)	CABIN AREA (m ²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
50 kg	0.20 m ² - 0.36 m ²	0.4	400 600	500 600	500 600	AG . 25.24	1 / 1
100 kg	0.37 m ² - 0.50 m ²	0.4	610 700	610 700	600 800		1 / 1
150 kg	0.5 m ² - 0.64 m ²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m ² - 1 m ²	0.4	810 1000	810 1000	1000 1200		1 / 2

➤ GUILLOTINE DOOR SINGLE ENTRANCE MCK 914


➤ 300 KG

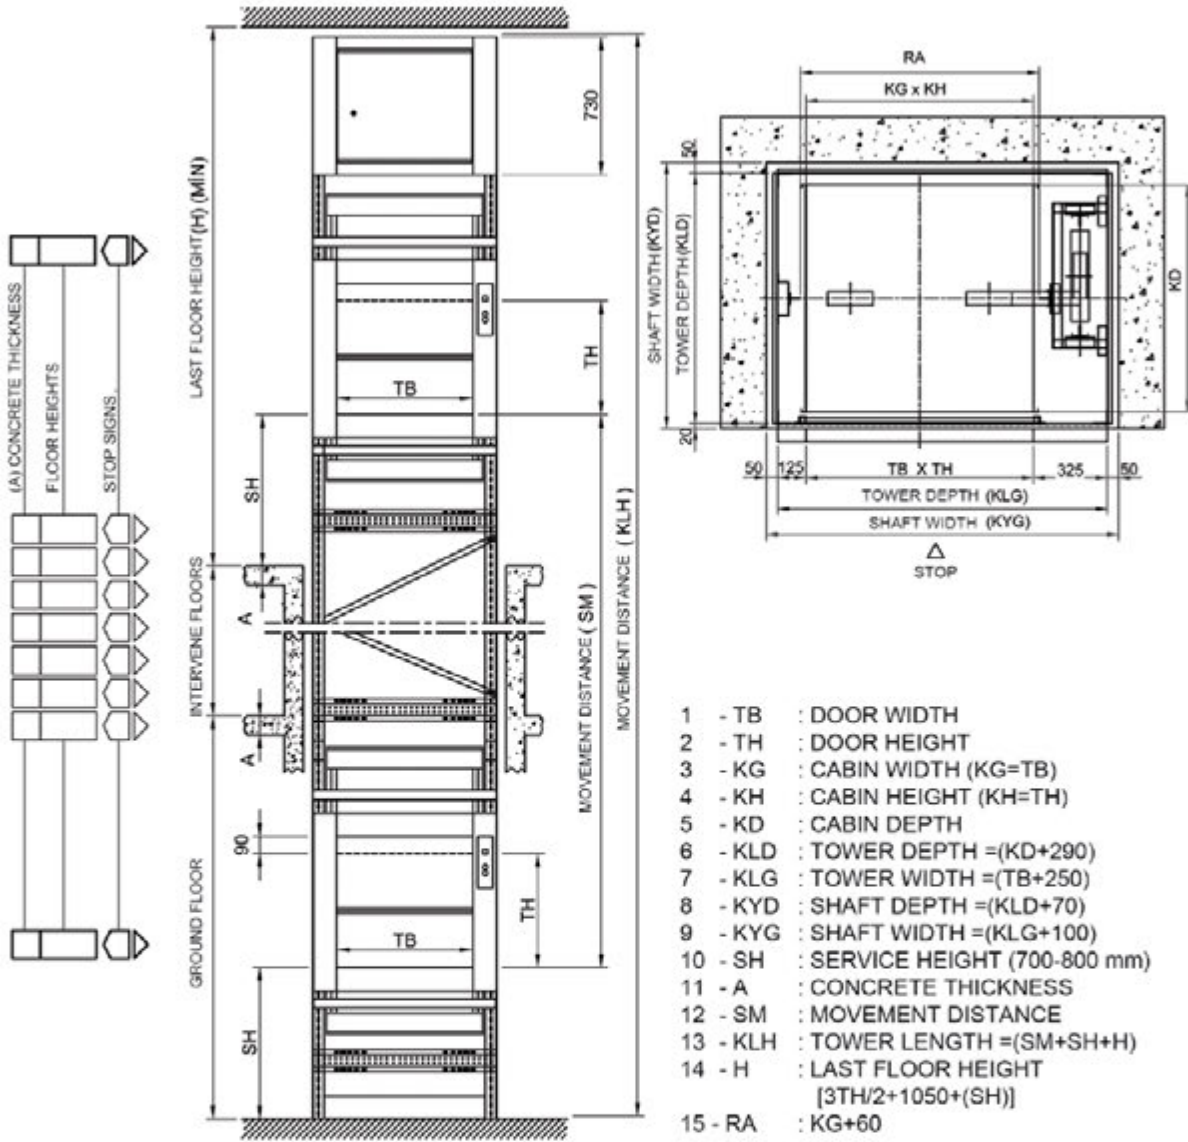

CAPACITY (Kg)	CABIN AREA (m ²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
50 kg	0.20 m ² - 0.36 m ²	0.4	400 600	500 600	500 600	AG . 25.24	1 / 1
100 kg	0.37 m ² - 0.50 m ²	0.4	610 700	610 700	600 800		1 / 1
150 kg	0.5 m ² - 0.64 m ²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m ² - 1 m ²	0.4	810 1000	810 1000	1000 1200		1 / 2

► GUILLOTINE DOOR SINGLE ENTRANCE MCK 915


► 300 KG

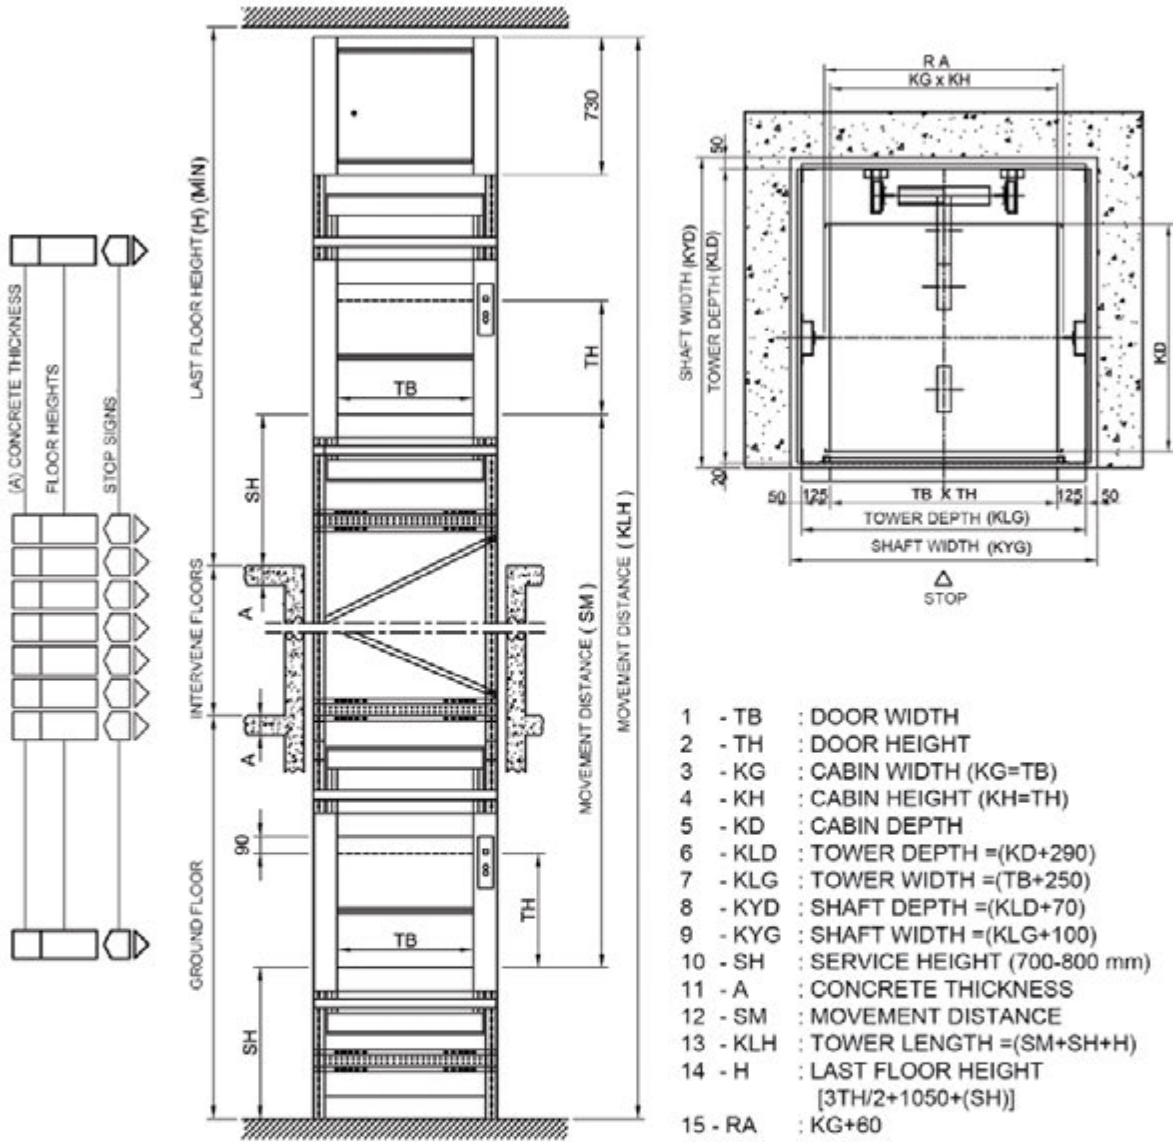

CAPACITY (Kg)	CABIN AREA (m ²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
50 kg	0.20 m ² - 0.36 m ²	0.4	400 600	500 600	500 600	AG . 25.24	1 / 1
100 kg	0.37 m ² - 0.50 m ²	0.4	610 700	610 700	600 800		1 / 1
150 kg	0.5 m ² - 0.64 m ²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m ² - 1 m ²	0.4	810 1000	810 1000	1000 1200		1 / 2


➤ GUILLOTINE DOOR PARALLEL ENTRANCE MCK 916

➤ 300 KG

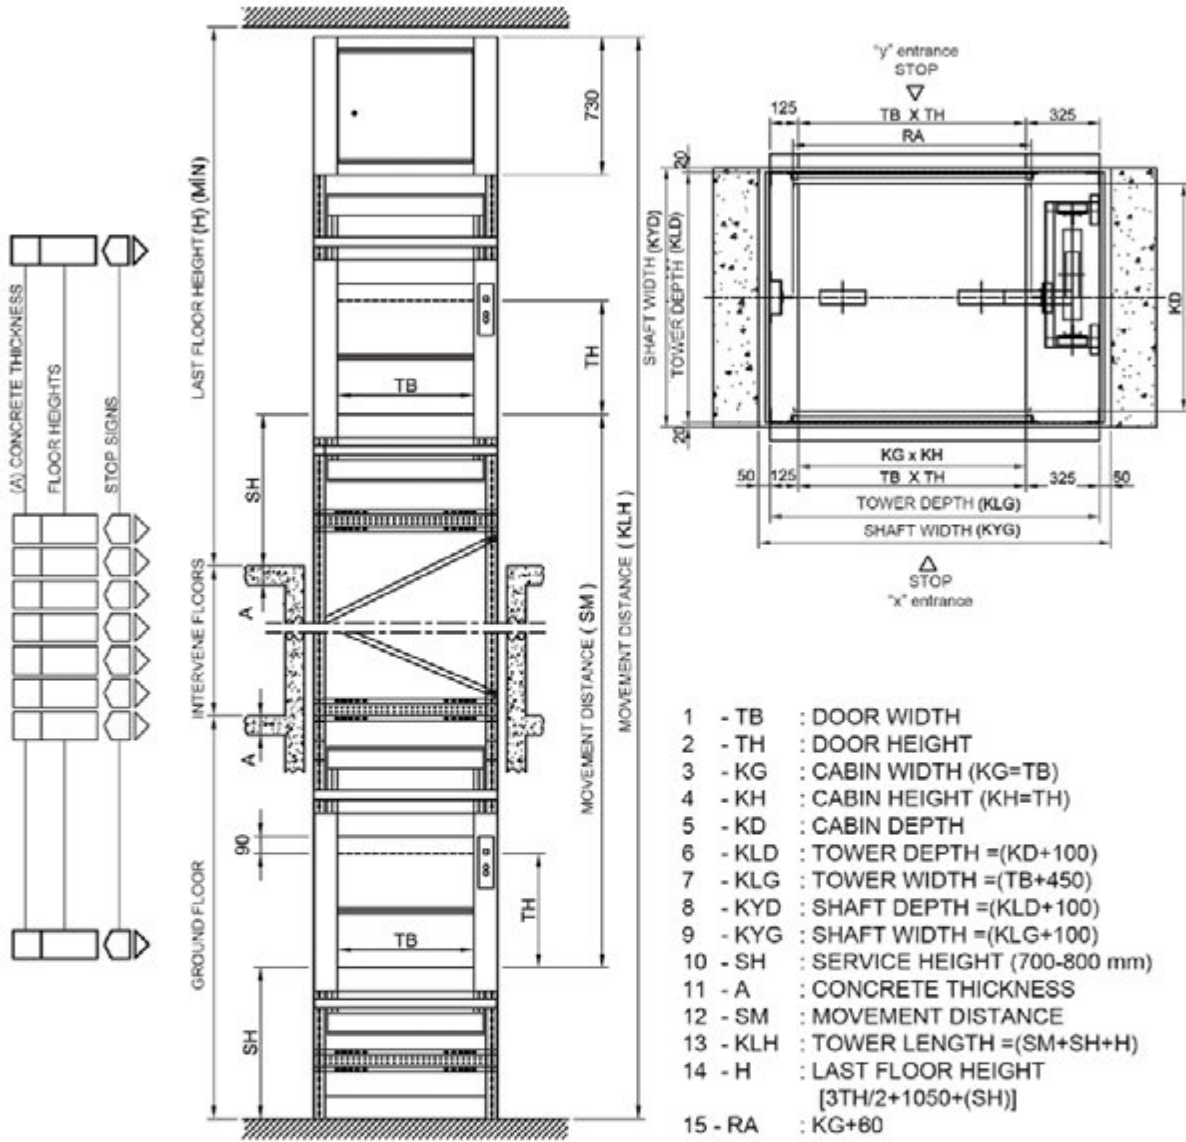


CAPACITY (Kg)	CABIN AREA (m ²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
50 kg	0.20 m ² - 0.36 m ²	0.4	400 600	500 600	500 600	AG . 25.24	1 / 1
100 kg	0.37 m ² - 0.50 m ²	0.4	610 700	610 700	600 800		1 / 1
150 kg	0.5 m ² - 0.64 m ²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m ² - 1 m ²	0.4	810 1000	810 1000	1000 1200		1 / 2


➤ SERVICE ELEVATOR MODELS WITH MANUEL DOOR

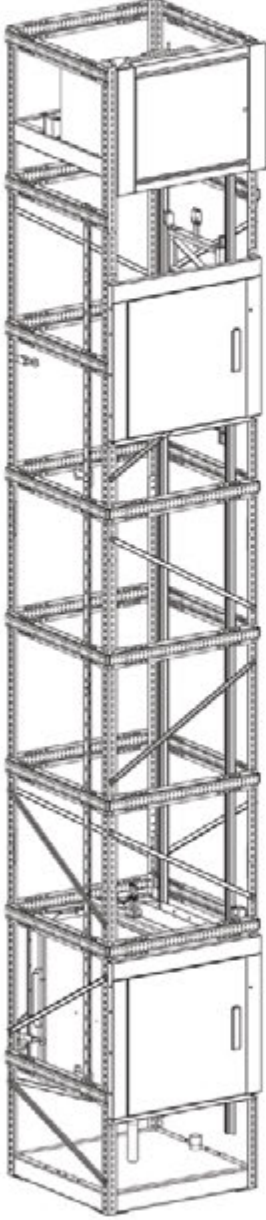

SINGLE ENTRANCE

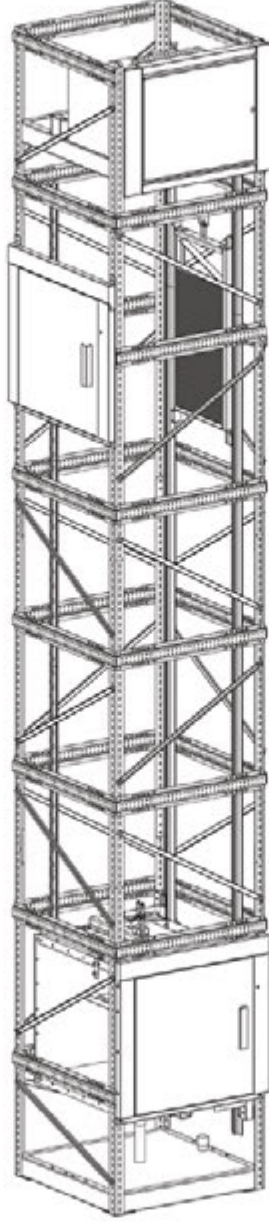


DIAGONAL ENTRANCE

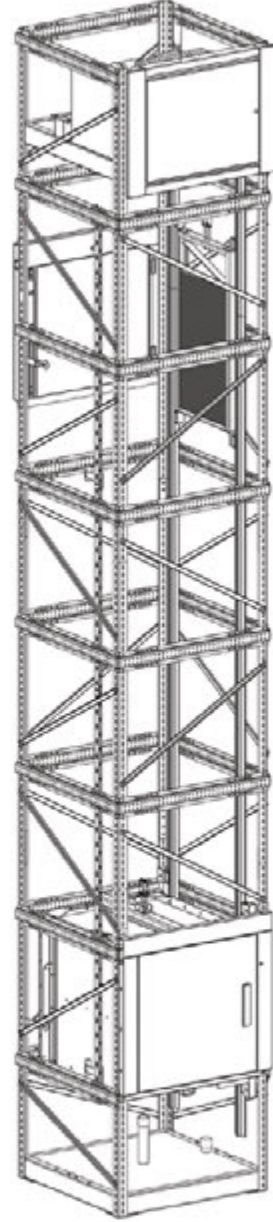

PARALLEL ENTRANCE

➤ MANUEL DOOR SINGLE ENTRANCE MCK 921

➤ 100 KG - 150 KG

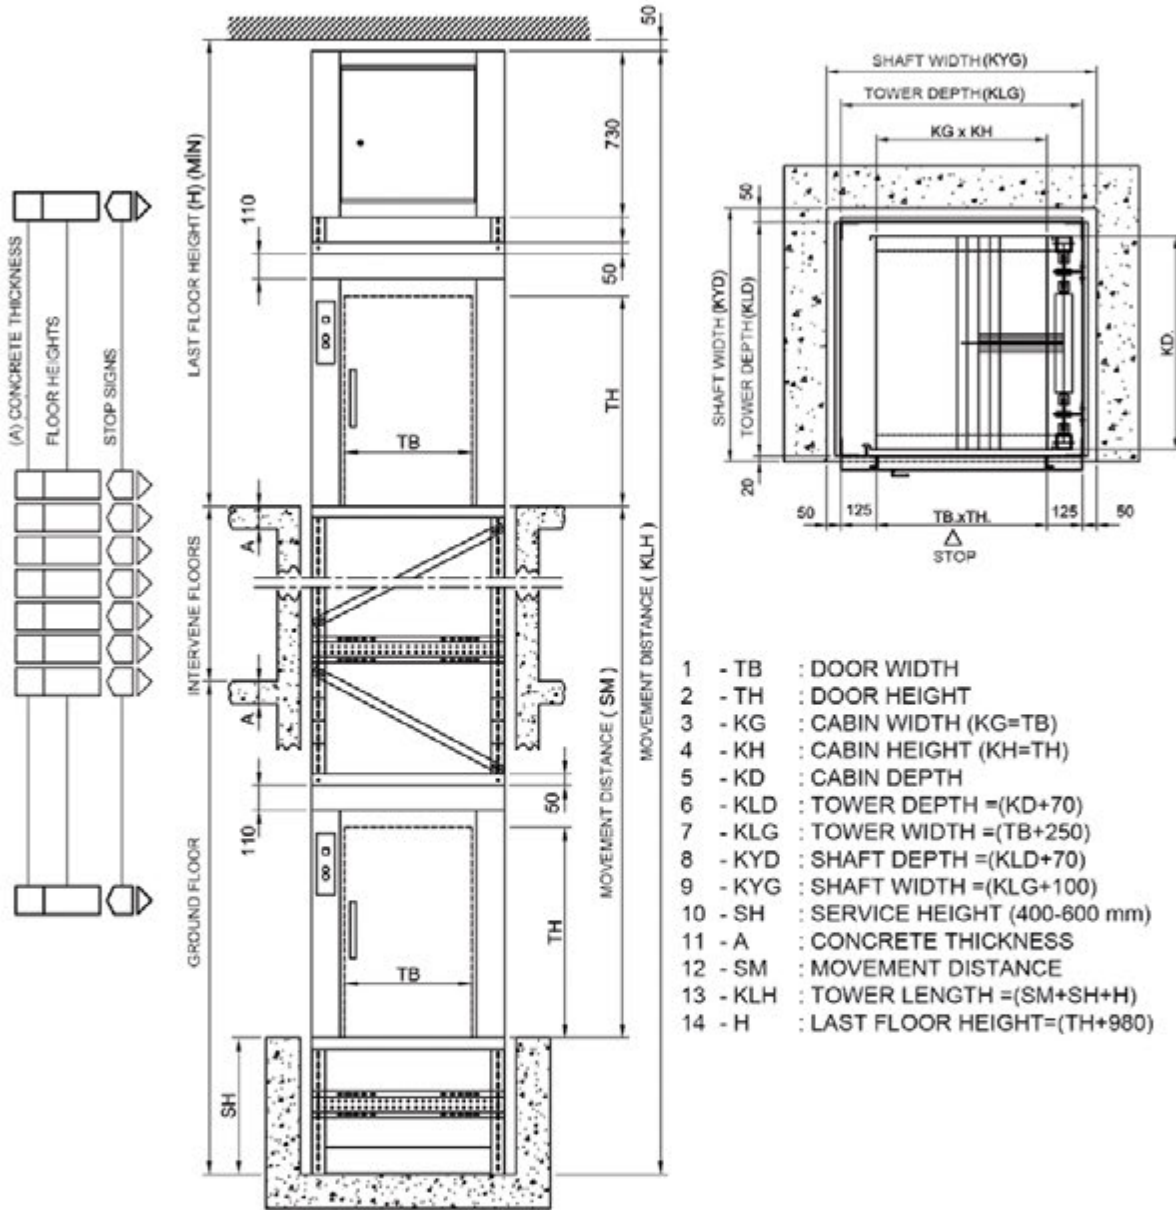


NOTE: IF THE LOADING WILL BE DONE FROM THE GROUND FLOOR OR THE OTHER FLOORS BY SERVICE CAR, SH SERVICE HEIGHT WILL BE "0". IN THIS SITUATION, 400-600 MM SHAFT BOTTOM DISTANCE WILL BE NEEDED FOR THE GROUND FLOOR.

CAPACITY (Kg)	CABIN AREA (m²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
100 kg	0.37 m² - 0.50 m²	0.4	600 700	600 700	600 800	AG . 25.24	1 / 1
150 kg	0.51 m² - 0.64 m²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m² - 1 m²	0.4	810 1000	810 1000	1000 1200		1 / 2

➤ MANUEL DOOR PARALLEL ENTRANCE MCK 922

➤ 100 KG - 150 KG

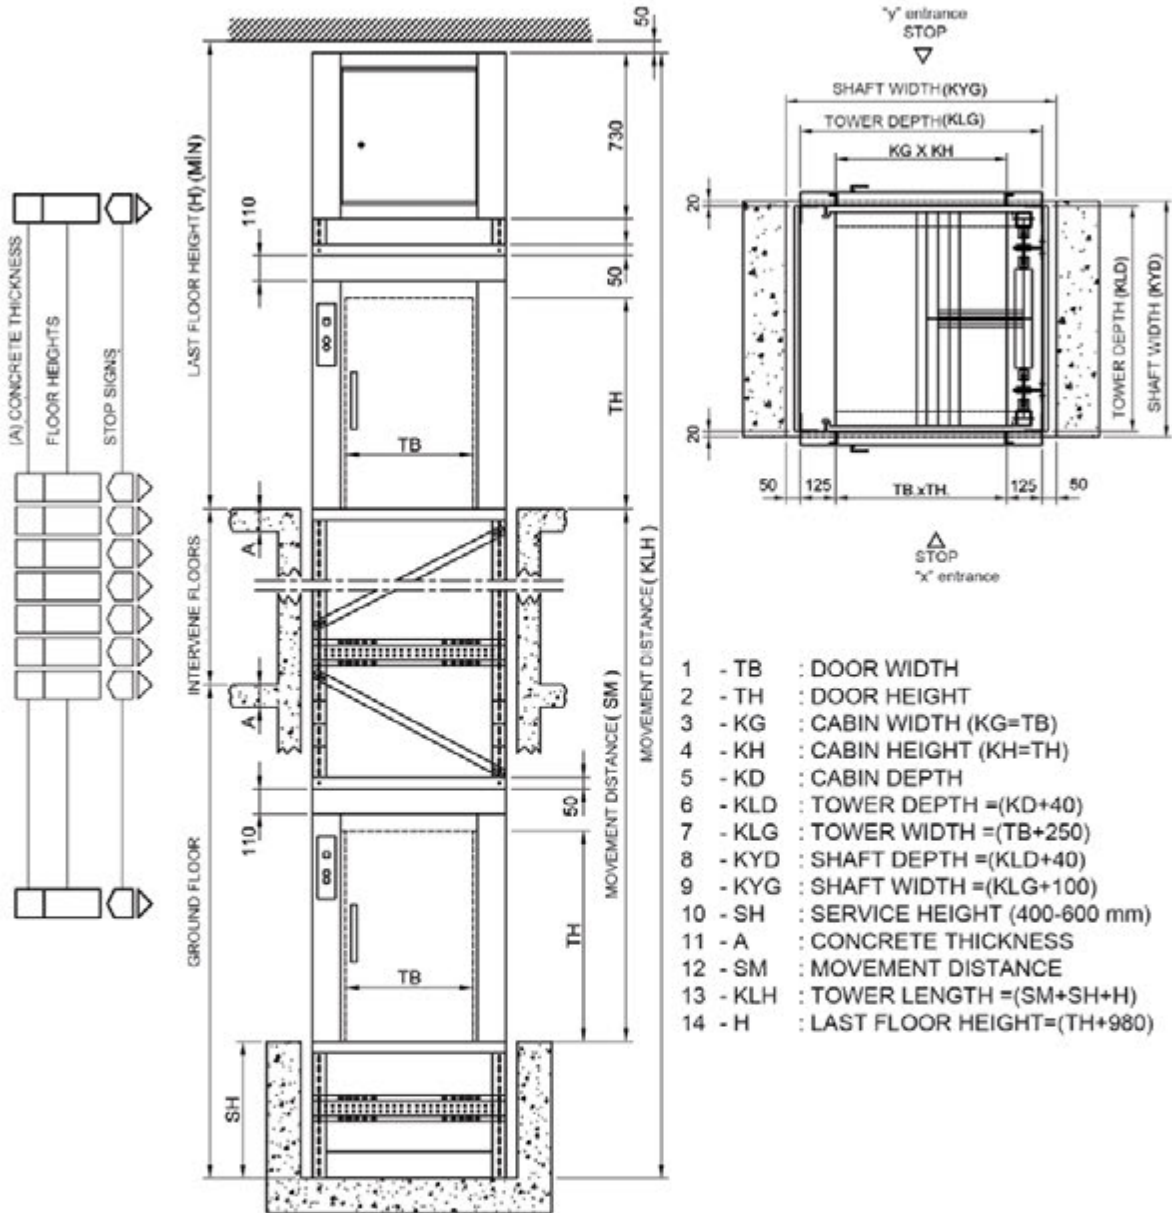


NOTE: IF THE LOADING WILL BE DONE FROM THE GROUND FLOOR OR THE OTHER FLOORS BY SERVICE CAR, SH SERVICE HEIGHT WILL BE "0". IN THIS SITUATION, 400-600 MM SHAFT BOTTOM DISTANCE WILL BE NEEDED FOR THE GROUND FLOOR.

CAPACITY (Kg)	CABIN AREA (m²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
100 kg	0.37 m² - 0.50 m²	0.4	600 700	600 700	600 800	AG . 25.24	1 / 1
150 kg	0.51 m² - 0.64 m²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m² - 1 m²	0.4	810 1000	810 1000	1000 1200		1 / 2

➤ MANUEL DOOR DIAGONAL ENTRANCE MCK 923

➤ 100 KG - 150 KG

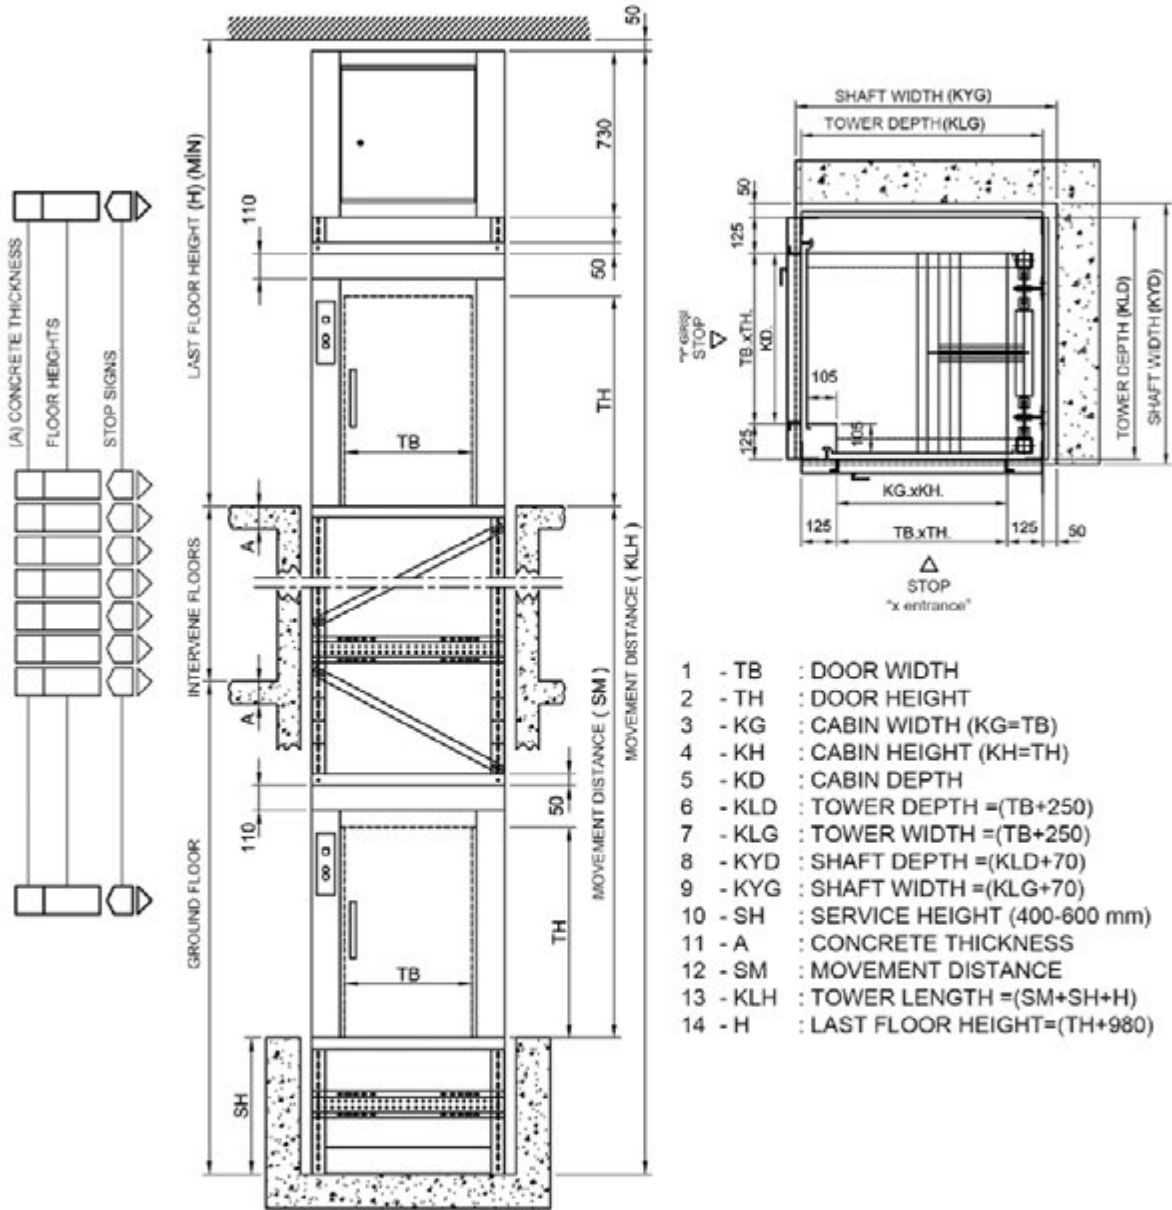


NOTE: IF THE LOADING WILL BE DONE FROM THE GROUND FLOOR OR THE OTHER FLOORS BY SERVICE CAR, SH SERVICE HEIGHT WILL BE "0". IN THIS SITUATION, 400-600 MM SHAFT BOTTOM DISTANCE WILL BE NEEDED FOR THE GROUND FLOOR.

CAPACITY (Kg)	CABIN AREA (m²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
100 kg	0.37 m² - 0.50 m²	0.4	600 700	600 700	600 800	AG . 25.24	1 / 1
150 kg	0.51 m² - 0.64 m²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m² - 1 m²	0.4	810 1000	810 1000	1000 1200		1 / 2

➤ MANUEL DOOR SINGLE ENTRANCE MCK 924

➤ 300 KG

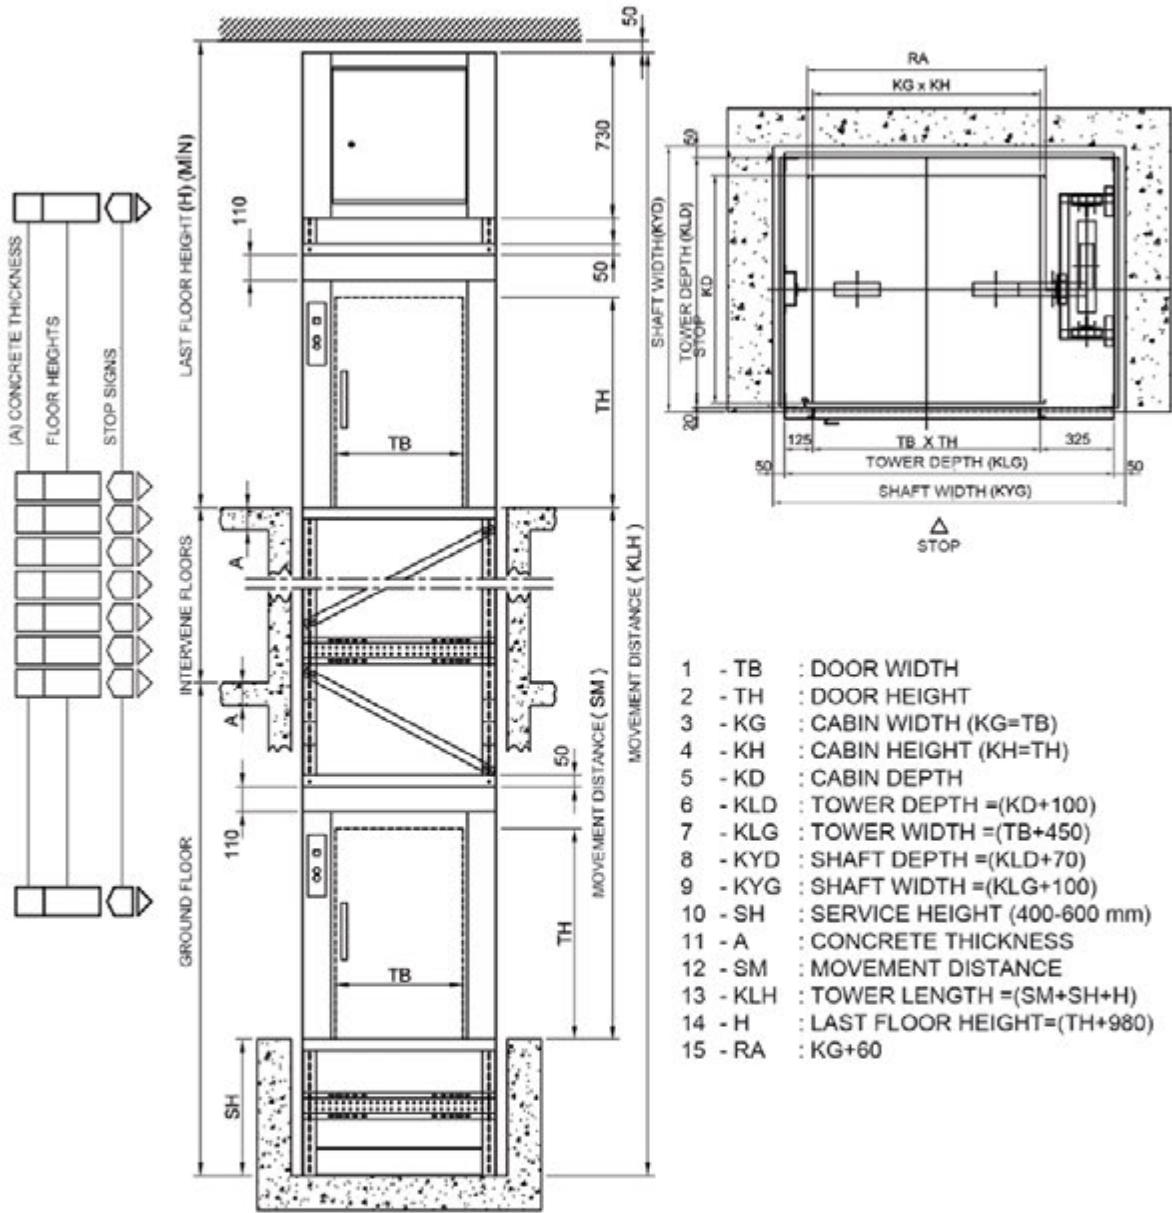


NOTE: IF THE LOADING WILL BE DONE FROM THE GROUND FLOOR OR THE OTHER FLOORS BY SERVICE CAR, SH SERVICE HEIGHT WILL BE "0". IN THIS SITUATION, 400-600 MM SHAFT BOTTOM DISTANCE WILL BE NEEDED FOR THE GROUND FLOOR.

CAPACITY (Kg)	CABIN AREA (m²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
100 kg	0.37 m² - 0.50 m²	0.4	600 700	600 700	600 800	AG . 25.24	1 / 1
150 kg	0.51 m² - 0.64 m²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m² - 1 m²	0.4	810 1000	810 1000	1000 1200		1 / 2

➤ MANUEL DOOR SINGLE ENTRANCE MCK 925

➤ 300 KG

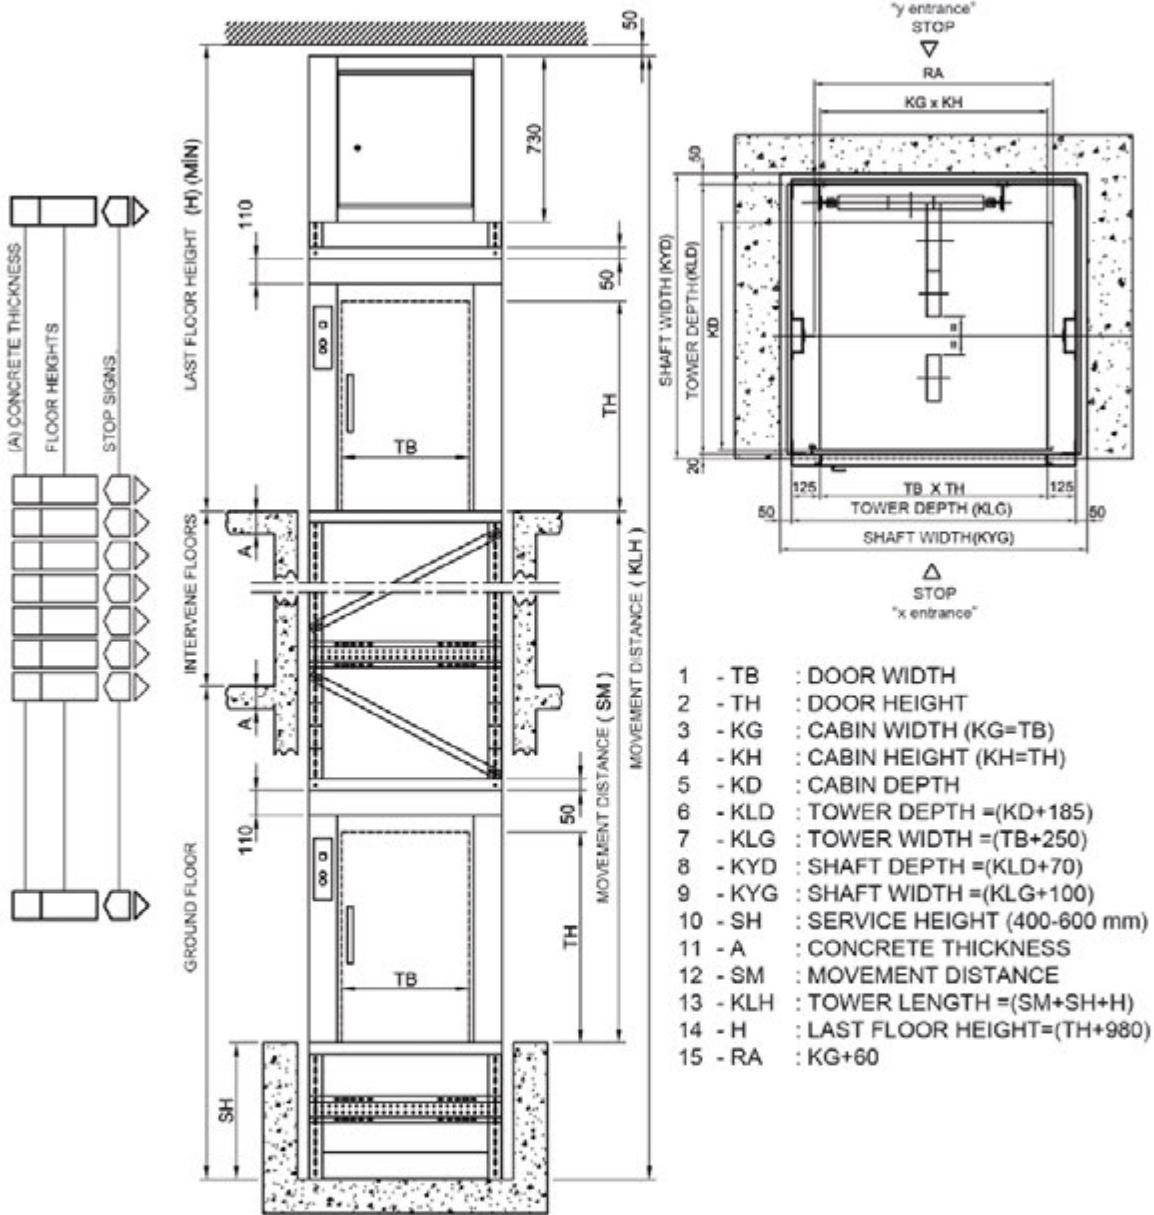


NOTE: IF THE LOADING WILL BE DONE FROM THE GROUND FLOOR OR THE OTHER FLOORS BY SERVICE CAR, SH SERVICE HEIGHT WILL BE "0". IN THIS SITUATION, 400-600 MM SHAFT BOTTOM DISTANCE WILL BE NEEDED FOR THE GROUND FLOOR.

CAPACITY (Kg)	CABIN AREA (m²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
100 kg	0.37 m² - 0.50 m²	0.4	600 700	600 700	600 800	AG . 25.24	1 / 1
150 kg	0.51 m² - 0.64 m²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m² - 1 m²	0.4	810 1000	810 1000	1000 1200		1 / 2

➤ MANUEL DOOR PARALLEL ENTRANCE MCK 926

➤ 300 KG

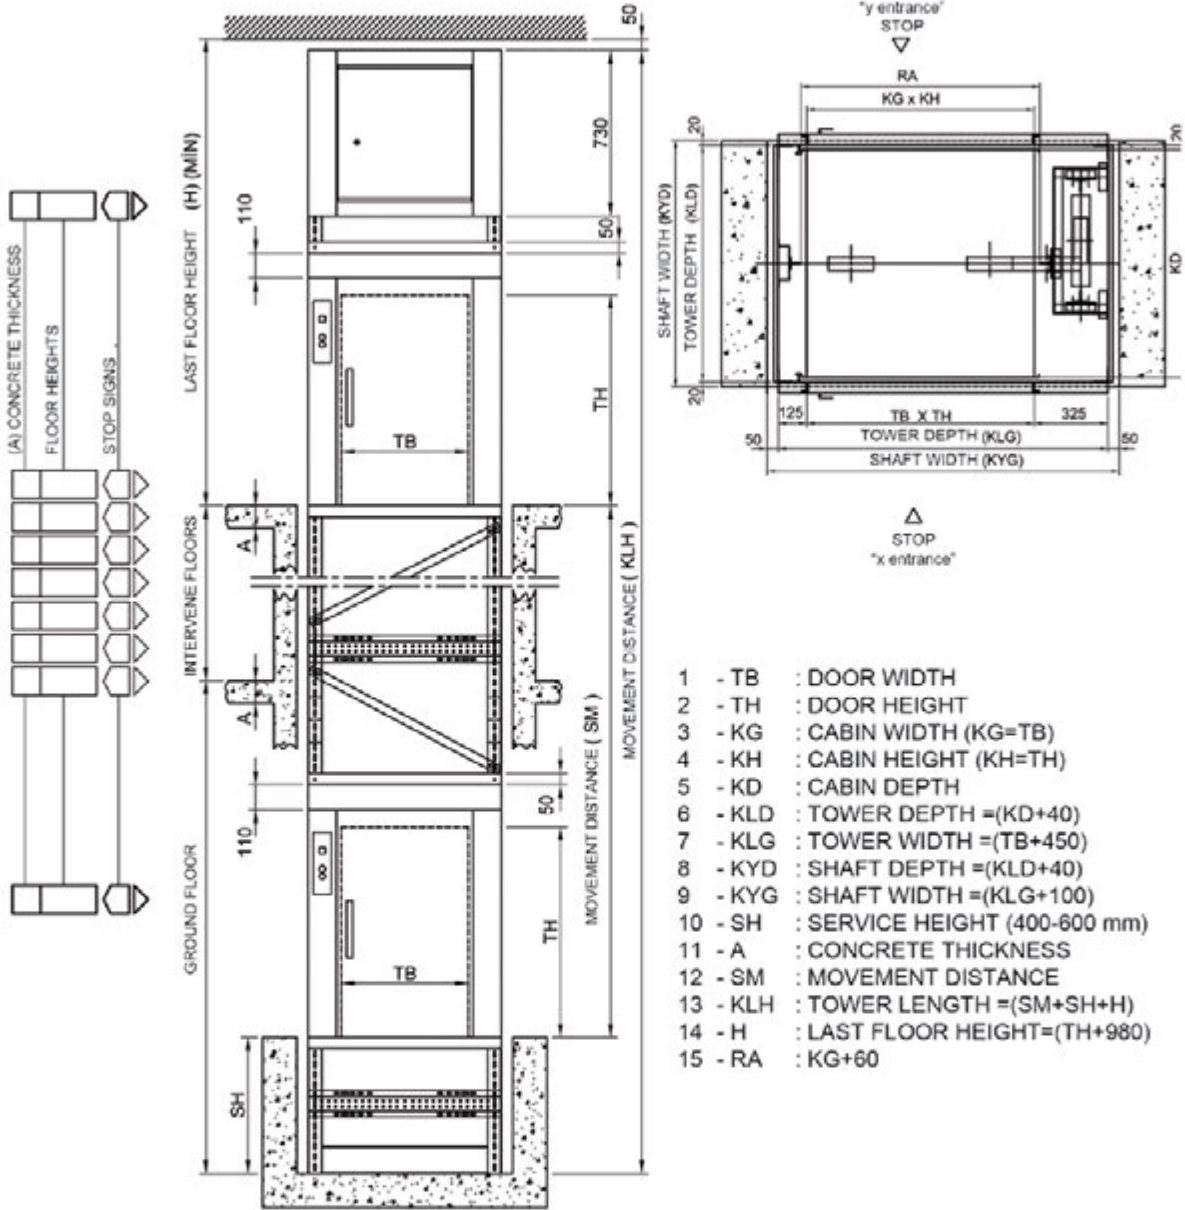


NOTE: IF THE LOADING WILL BE DONE FROM THE GROUND FLOOR OR THE OTHER FLOORS BY SERVICE CAR, SH SERVICE HEIGHT WILL BE "0". IN THIS SITUATION, 400-600 MM SHAFT BOTTOM DISTANCE WILL BE NEEDED FOR THE GROUND FLOOR.

CAPASITY (Kg)	CABIN AREA (m ²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
100 kg	0.37 m ² - 0.50 m ²	0.4	600 700	600 700	600 800	AG . 25.24	1 / 1
150 kg	0.51 m ² - 0.64 m ²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m ² - 1 m ²	0.4	810 1000	810 1000	1000 1200		1 / 2

➤ MANUEL DOOR DIAGONAL ENTRANCE MCK 927

➤ 300 KG

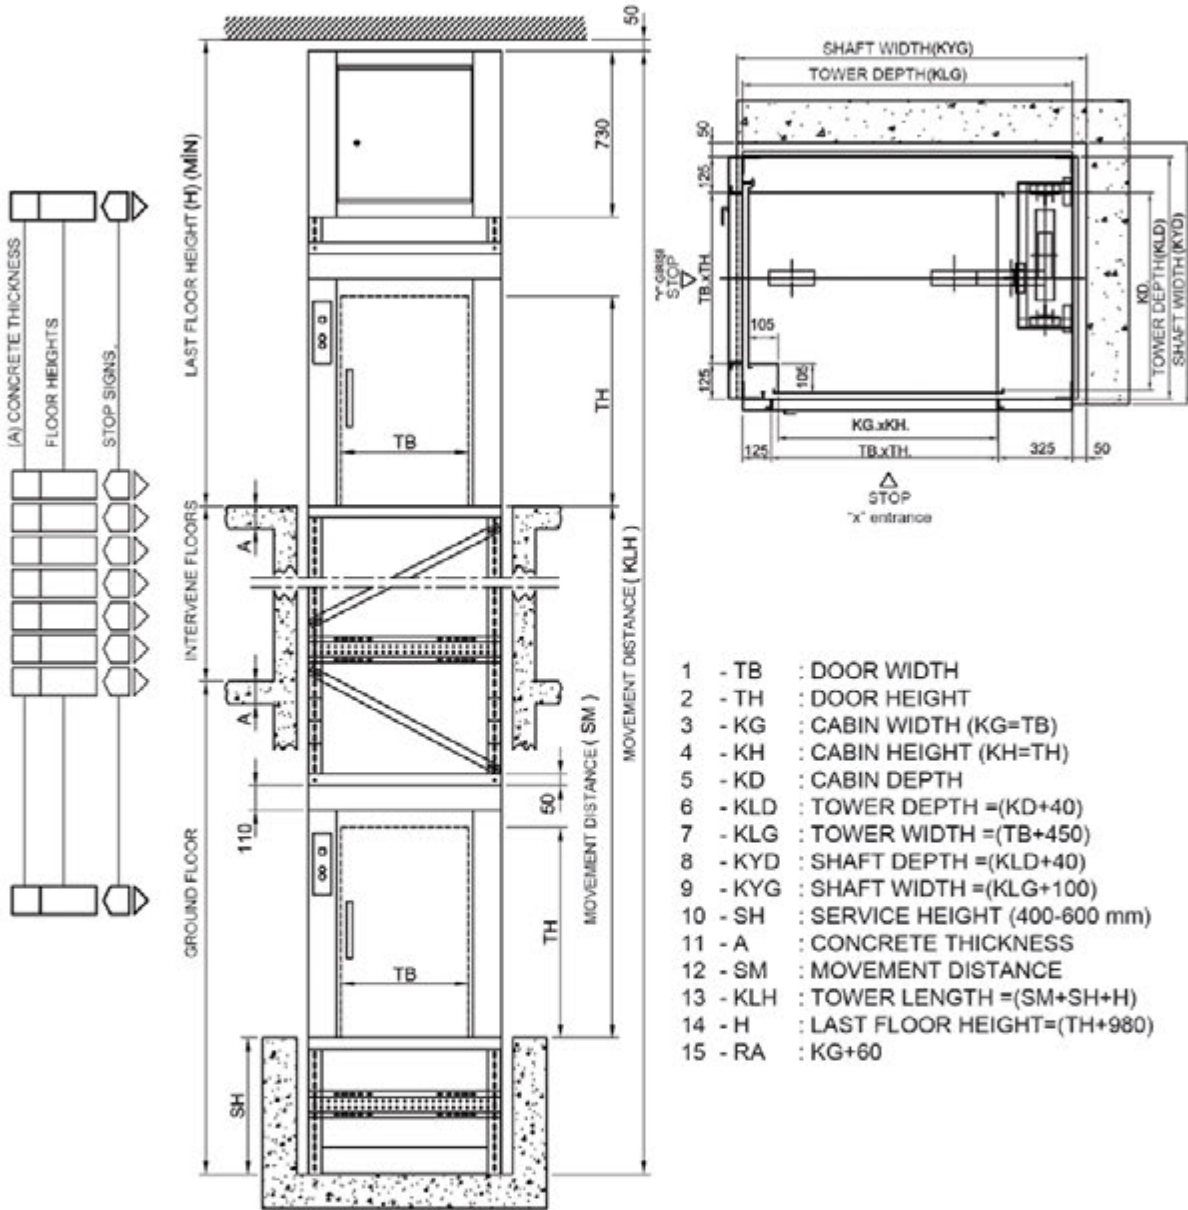

NOTE: IF THE LOADING WILL BE DONE FROM THE GROUND FLOOR OR THE OTHER FLOORS BY SERVICE CAR, SH SERVICE HEIGHT WILL BE "0". IN THIS SITUATION, 400-600 MM SHAFT BOTTOM DISTANCE WILL BE NEEDED FOR THE GROUND FLOOR.

CAPACITY (Kg)	CABIN AREA (m ²)	SPEED (V) (M / sn)	KG. (mm) (Min. - Max.)	KD. (mm) (Min. - Max.)	KH. (mm) (Min. - Max.)	MOTOR TYPE	LIFTING RATE
100 kg	0.37 m ² - 0.50 m ²	0.4	600 700	600 700	600 800	AG . 25.24	1 / 1
150 kg	0.51 m ² - 0.64 m ²	0.8	710 800	710 800	800 1000	AG . 25 . 48	1 / 1
300 kg	0.65 m ² - 1 m ²	0.4	810 1000	810 1000	1000 1200		1 / 2

TECHNOLOGY

TECHNOLOGY
AND
DESIGN

DESIGN

MEKİSAN ASANSÖR VE ÇELİK KONSTRÜKSİYON SANAYİ LİMİTED ŞİRKETİ
BALÇIK KÖYÜ AYDIN SK. NO:2 TR-41490 GEBZE / KOCAELİ
TEL: +90 262 751 00 50 FAX: +90 262 751 29 90
web: www.mekisan.com mail: info@mekisan.com

